




Changzhou Suma Precision Machinery Co.,Ltd

Address: Liudao Industrial Park, Yaoguan Town, Wujin, Changzhou , Jiangsu , China 213102

Contact person: Ellen Zhang Skype: suma.com5

Email: ellen@chinasuma.com Tel: 86 18068536660

BSEU Technical Parameter

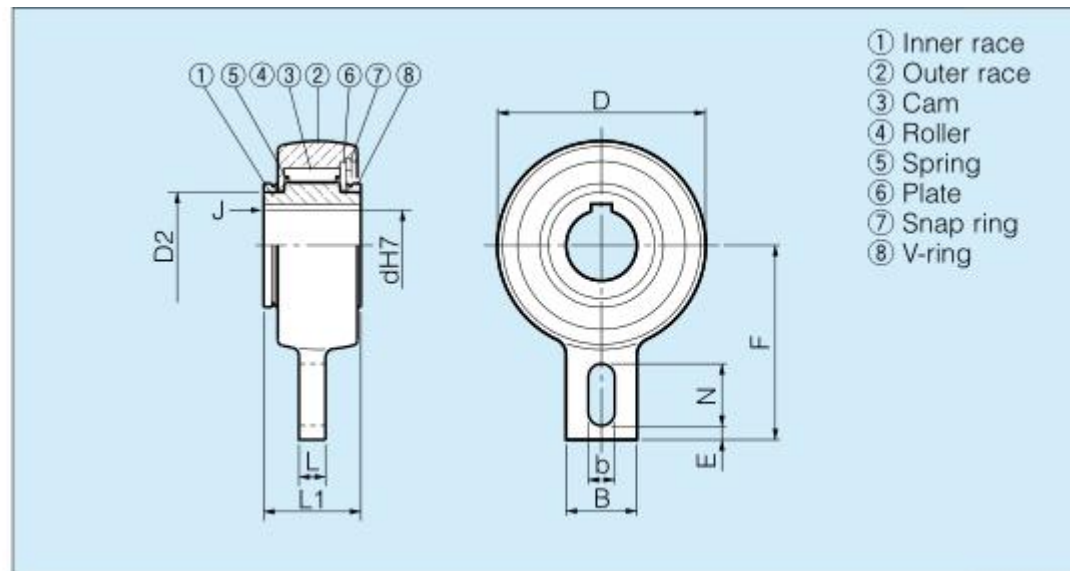


Model	Bore size	Keyway	Torque capacity	Inner Race Max Overrunning	D	D2	L1	L	B	F	b	N	E	J	W. min	W.Max
	Dia(H7)		N.m	r/min												
BSEU25-20	20	6X2.8	216	500	83	42	35	12	40	90	15	35	5	1.0	0.999	0.948
BSEU25-25	25	8X3.3	216	500	83	42	35	12	40	90	15	35	5	1.0		
BSEU40-20	20	6X2.8	1440	450	118	60	55	15	40	110	15	35	8	1.5	3.781	3.363
BSEU40-25	25	8X3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5		
BSEU40-30	30	8X3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5		
BSEU40-35	35	10X3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5		
BSEU40-40	40	12X3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5		
BSEU70-45	45	14X3.8	3140	350	165	90	59	20	80	140	18	35	10	1.5	7.607	6.541
BSEU70-50	50	14X3.8	3140	350	165	90	59	20	80	140	18	35	10	2.0		
BSEU70-55	55	16X4.3	3140	350	165	90	59	20	80	140	18	35	10	2.0		
BSEU70-60	60	18X4.4	3140	350	165	90	59	20	80	140	18	35	10	2.0		
BSEU70-65	65	18X4.4	3140	350	165	90	59	20	80	140	18	35	10	2.0		
BSEU70-70	70	20X4.9	3140	350	165	90	59	20	80	140	18	35	10	2.0		
BSEU90-75	75	20X4.9	4700	250	190	120	63	20	80	165	20	40	15	2.0	10.046	9.265
BSEU90-80	80	22X5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0		
BESU90-85	85	22X5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0		
BSEU90-90	90	25X5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0		


W. min: Weight at Minimum Bore

W. max: weight at Maximum bore

■ Installation and usage

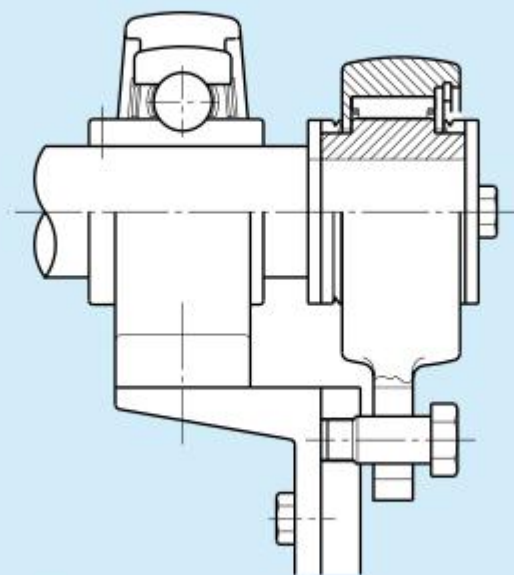

Typical Installation 1

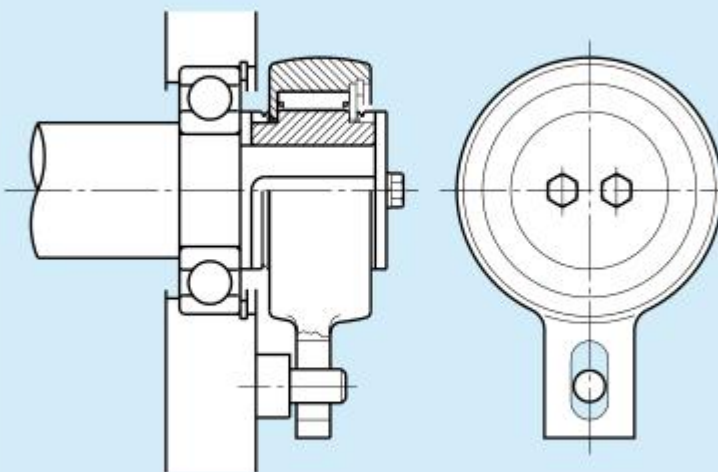

Typical Installation 2

