


Technical Parameter



Model	Torque Capacity (Nm)	Max overrunning (r/min) Inner race	Drag Torque(N-m)	A	B	C	PCD D	E	S	H-M Size× Pitch × No.of Tapped Holes
BS30	294	350	0.58	64	90	64	80	45	13	M 6 ×P1.0×4
BS50	784	300	0.98	67	125	67	110	70	16	M 8 ×P1.25×4
BS65	1570	340	3.92	90	160	85	140	90	20	M10 ×P1.5×6
BS75	2450	300	5.88	90	170	85	150	100	20	M10 ×P1.5×6
BS85	5880	300	7.84	115	210	110	185	115	30	M12 ×P1.75×6
BS95	7840	250	9.8	115	230	110	200	130	30	M14 ×P2.0× 6
BS110	10800	250	14.7	115	270	110	220	150	30	M16 ×P2.0× 6
BS135	15700	200	19.6	135	320	130	280	180	30	M16 ×P2.0× 8

PICTURE

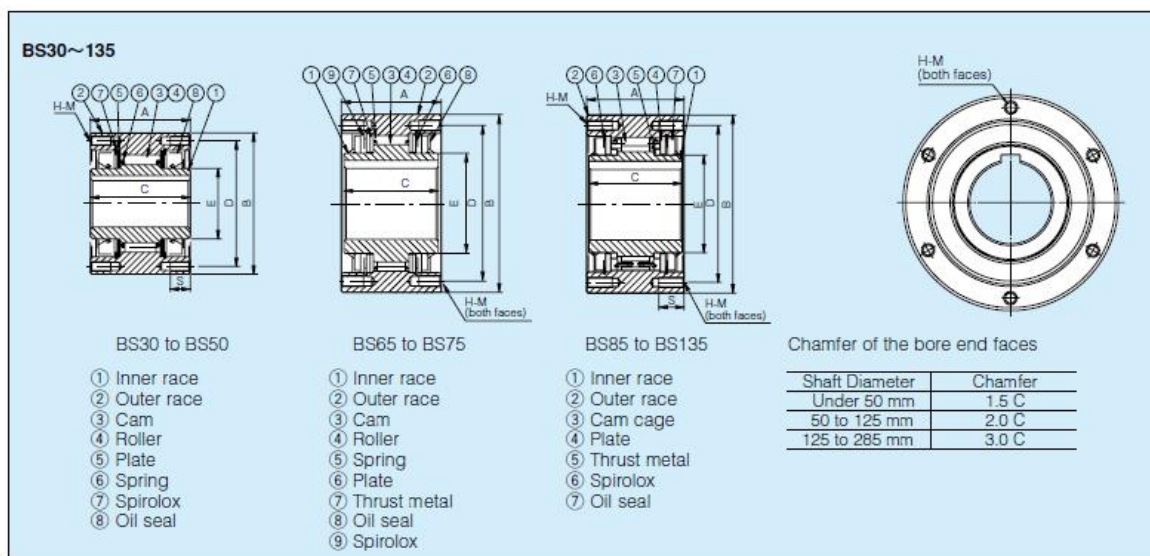

PACKAGE

