


Changzhou Suma Precision Machinery Co.,Ltd

Address: Liudao Industrial Park, Yaoguan Town, Wujin Dist. Changzhou Jiangsu , China 213102

Contact person: Ellen Zhang
Email: ellen@chinasuma.com

Skype: suma.com5
Tel: 0086 18068536660

Technical parameter of MZ Cam clutch

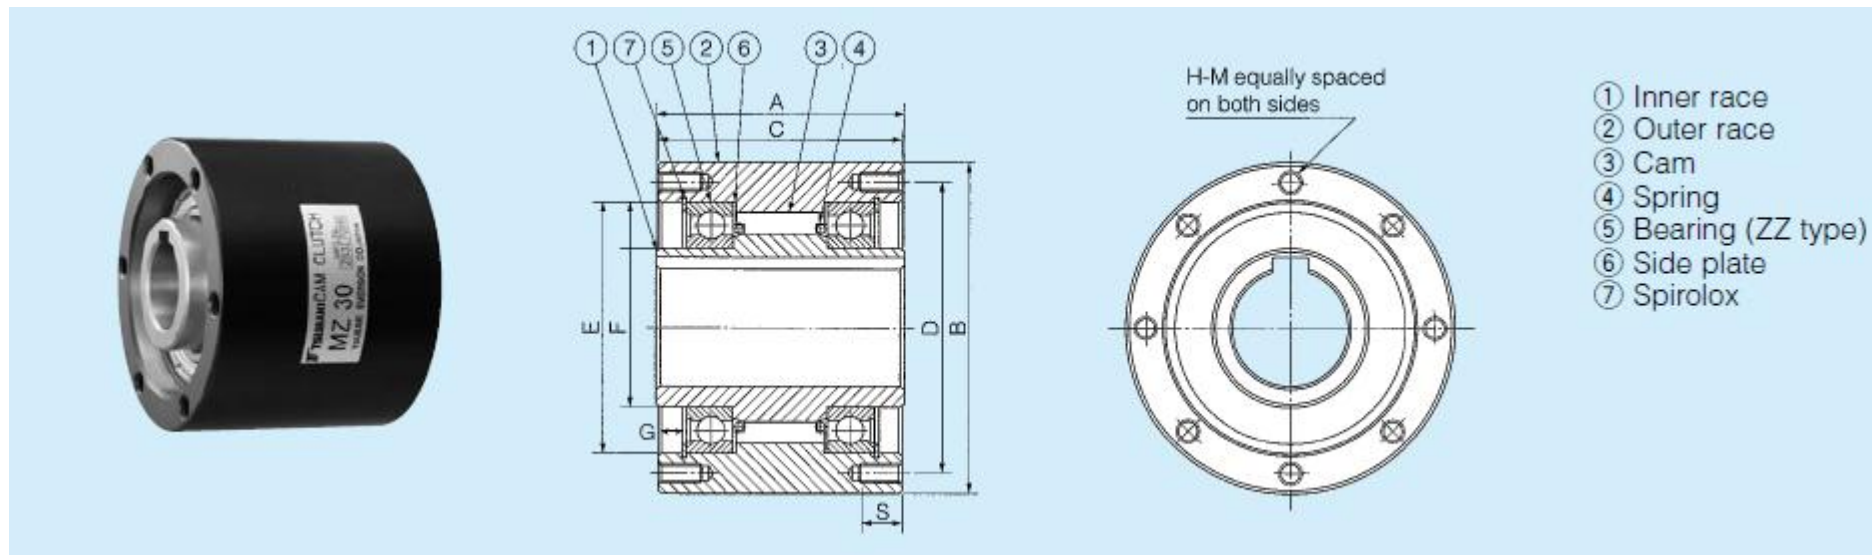

Model	Torque capacity (Nm)	Drag Torque (Nm)	Max Overrunning(r/m in)		Max indexing (cycle/nin)	Bore size		A	C	B	F	E (M6)	G	PCD D	S	H-M No.of Tapped Holes ×Size ×Pitch	Weight (kg)
			Inner race	Outer race		Dia. (H7)	keyway										
MZ15	186	0.2	2200	900	150	15	5×2.3	62	60	68	25	47	5.5	58	10	6-M5×0.8	1.4
MZ17	215	0.2	2000	800	150	17	5×2.3	66	64	75	28	52	6.3	64	10	6-M5×0.8	1.8
MZ20	323	0.29	1900	700	150	20	6×2.8	67	65	80	30	55	7.6	68	12	6-M6×1.0	2.0
MZ30-22	735	0.39	1800	500	150	22	6×2.8	82	80	100	45	75	8.9	88	16	6-M8×1.25	3.7
MZ30-25						25	8×3.3										
MZ30						30	10×3.3										
MZ35	1080	0.49	1700	300	150	35	10×3.3	87	85	110	50	80	8.7	95	16	6-M8×1.25	4.8
MZ45-40	1620	0.69	1700	300	150	40	12×3.3	92	90	125	60	95	8.4	110	16	8-M8×1.25	6.2
MZ45						45	14×3.3										
MZ60-50	2110	0.98	1600	250	150	50	14×3.8	102	100	155	80	125	9.1	140	16	8-M8×1.25	10.2
MZ60-55						55	16×4.3										
MZ60						60	18×4.4										
MZ70-65	3040	1.27	1300	250	150	65	18×4.4	105	103	175	95	145	8.6	162	16	8-M8×1.25	13.2
MZ70						70	20×4.9										

PICTURES

